

Annual review November 2013



Multi Metric Approach

Presentation Outline

- Context
- Concept description
- Steps
- Status
- Implementation
- Next steps

Context

Systems of Systems and Industrial Control Systems (ICSs)

- Searching for solutions for security interoperability in a systems of systems approach
- Metric will be always business oriented and therefore particularised to scenarios
 - Different metrics and diverse units
 - Indicators
- Operators need applicable tools for managing SPD measurement and always linked to business and operation
- We need to measure also the impact of SPD implementation and deployment in operation

Concept description

A Meta-heuristically Optimized Fuzzy Approach towards Multi-Metric Security Risk Assessment in Heterogeneous System of Systems

- Risk based metrics identification
- Fuzzy expert system for aggregation and composition (if-then-else clauses): for operator comprehension
- Meta-heuristic (genetic algorithms) for metric precision and accuracy mechanism as learning system

Easy to design and understand by operator/end user

Subjectivity is based on the knowledge of the operator

Steps

We need the following steps for managing SMART SECURITY metrics:

- **Scenario risk analysis and risk identification:** examples 1) delay 2) man in the middle
- **Selection of metrics:** system operators will select specific security metrics according to the requirements and risk factors of the scenario at hand. (more than 60 in 2.5)
 - Example for risk identified:
 - Network latency
 - Key length for simetric algorithm
- **Normalization and regression:** Each of the metrics identified previously may feature different units and value range. Example Network Latency:
 - Finally we get a SPD metric: e.g. $M_{NL} = [20, 40, 60]$

Network Latency Metric

Time	0	1	2	3	4	5	6	7	8	9	10	11	15	25
S	0	2	4	6	8	11	14	17	20	23	26	32	44	58
Level														

Steps

- **Fuzzy System as understandable mechanisms for operators and scenario owners:**
 - Develop linguistic fuzzy variables

Linguistic Variables for INPUTS in ES	Fuzzy [SPD] triangular
Very Low	[0,0,1]
Low	[10,15,18]
Medium	[30, 40, 26]
Medium-High	[60, 55, 66]
High	[80,75,88]



Linguistic Variables for OUTPUTS in ES
Green
Red
Yellow

Steps

- **Fuzzy Expert Systems** : Consists of an aggregation and decision making engine that processes the numerical values of the monitored security metrics
 - With IF-THEN-ELSE conditional statements we get composition
 - Tailor the mapping between the numerical and linguistic domains corresponding to the SPD values of the considered metric with their fuzzy representation and processing through the rule set

IF S_{NL} is HIGH and D_{KeyMan} is MEDIUM-HIGH

then

Matrix [Network, S] := Green

IF

Steps

- **Meta-heuristically LEARNING system optimisation**

- An Outcome example from expert system could be as follows

	S	P	D
Node	G	R	R
Network	Y	Y	Y
Middleware	Y	G	R
Overlay	G	Y	Y


- However system operator could decide depending his/her experience that the correct systems status is:

	S	P	D
Node	G	R	R
Network	Y	Y	Y
Middleware	Y	G	Y
Overlay	G	Y	Y

- Via evolutionary algorithms, we plan to analyze and benchmark the performance. As optimiser metric we will use:
Optimiser metric = n° of correct colours / n° of total colours
- For new members for evolutionary iteration mutation will be solved:
 1. changing linguistic variables and SPD table
 2. Changing expert system inference rules according to expert system

Steps

- Multi-metric Aggregation based on Expert Systems and Meta-heuristically Optimized Fuzzy Systems. Architecture.

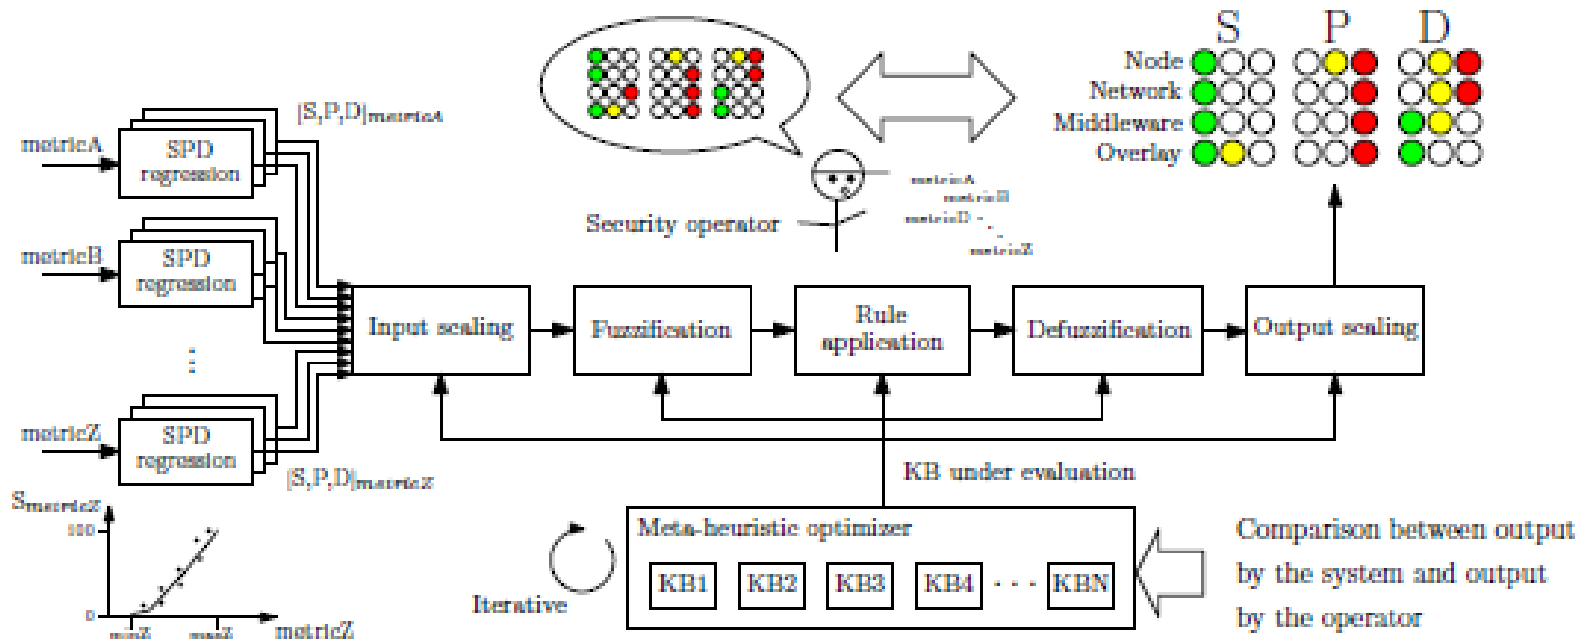

Implementation

- 1) We are approaching the implementation through an extension of an agent developed by TUC
- 2) Event Calculus to formally model the dynamic behavior of multi-metric approach
- 3) Considering cost concept to have an economic assessment for decision making
- 4) This is an ongoing task

The END



That's all folks!